


Rotary mower 1200 - City Ranger 2260

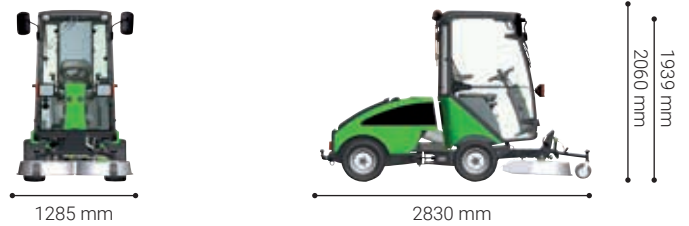

Standard equipment:

- Tilting for cleaning** The mower can tilt up and rest on two support wheels making cleaning easy.
- Floating function** After lifting the mower it quickly returns to the floating position.

Extra equipment (options):

- Top filter** For extra protection against overheating of the engine it is recommended to equip your City Ranger 2260 with a top filter when mowing the grass.
- Mulch kit** The rotary mower can be changed into a mulch mower with a cover placed inside the same mowing deck. Mulching creates fine trimmings, which supply the soil with natural nutrients and reduces the need of fertilisers.
- Collection mower (kit)** Rebuild the rotary mower to a collection mower. Collecting the grass trimmings ensures the most professional looking result and healthiest lawn. It is recommended to use the dedicated grass collector for this purpose. Please see data sheet on suction sweeper for details.

Technical specifications

Dimensions		
Length	mm	2830
Width	mm	1285
Height with cabin / roll bar (ROPS)	mm	1939 / 2060
Storage dimensions		
Length	mm	1080
Width	mm	1285
Height	mm	580
Weight		
Weight (rotary mower)	kg	100
Performance		
Ground clearance below mower	mm	100
No. of mower blades	pcs.	2
Cutting speed (tip speed)	m/sec.	77
Cutting width	mm	1210
Adjustable cutting height	mm	30-70
Theoretical mowing area - rotary	m ² /h	15600
Theoretical mowing area - collection / mulch	m ² /h	12000
Max. recommended operating speed		
Rotary mower *	km/h	1-13
Collection mower *	km/h	1-10
Mulch mower (shorter grass) *	km/h	1-10
* Depends on grass and height		
Noise level		
Noise level - outside LwA (2000/14/EC)	dB(A)	105
CE certified according to EU directive		

